

QuadGuard® M Wide Crash Cushion Data Sheet

MASH crash cushion able to shield hazards up to 1.75m


Features & Benefits

- Compliant to MASH TL3.
- Able to shield hazards up to 1.75m wide
- Repairable after an impact within MASH test standards.
- High strength Quad-Beam™ panels.
- Does not use anchoring chains or tension cables.
- Consists of many of the same components as the QuadGuard family.

The QuadGuard M Wide is a MASH TL-3 crash cushion, able to effectively shield hazards up to 1755mm wide. Wider hazards may be accommodated by flaring outward with guardrail or concrete barrier.

The QuadGuard M Wide shares the basic architecture and a majority of components with the 610mm TL-3 QuadGuard M10, including the energy absorbing cartridges.

The QuadGuard® M Wide, as a member of the QuadGuard® family of crash cushions, consists of many of the same components as the Quad Guard®. The QuadGuard® M Wide is repairable after an impact within the MASH test standards

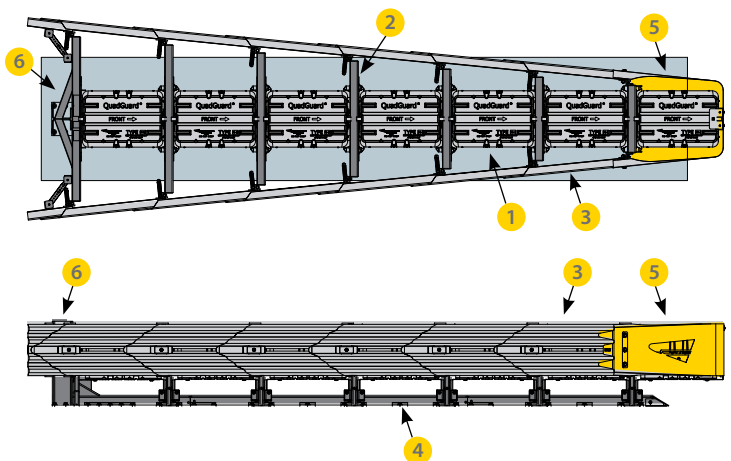

- | | |
|-----------------------|-----------------|
| 1 QuadGuard Cartridge | 4 Monorail |
| 2 Diaphragm | 5 Nose Assembly |
| 3 Fender Panel | 6 Backup |

MASH TL3 COMPLIANT

1,100kg car at 100km/h and 25°, or
2,270kg pick-up (ute) at 100km/h and 25°

QuadGuard M Wide Specifications

Bays	System Length	Effective Length	Pad Length	Maximum Design Speed	No. of Cartridges	
					Type I	Type II
6	6.71m	6.30m	6.40m	100 km/h	4	3